


HZDR-SS



HZDR-SS

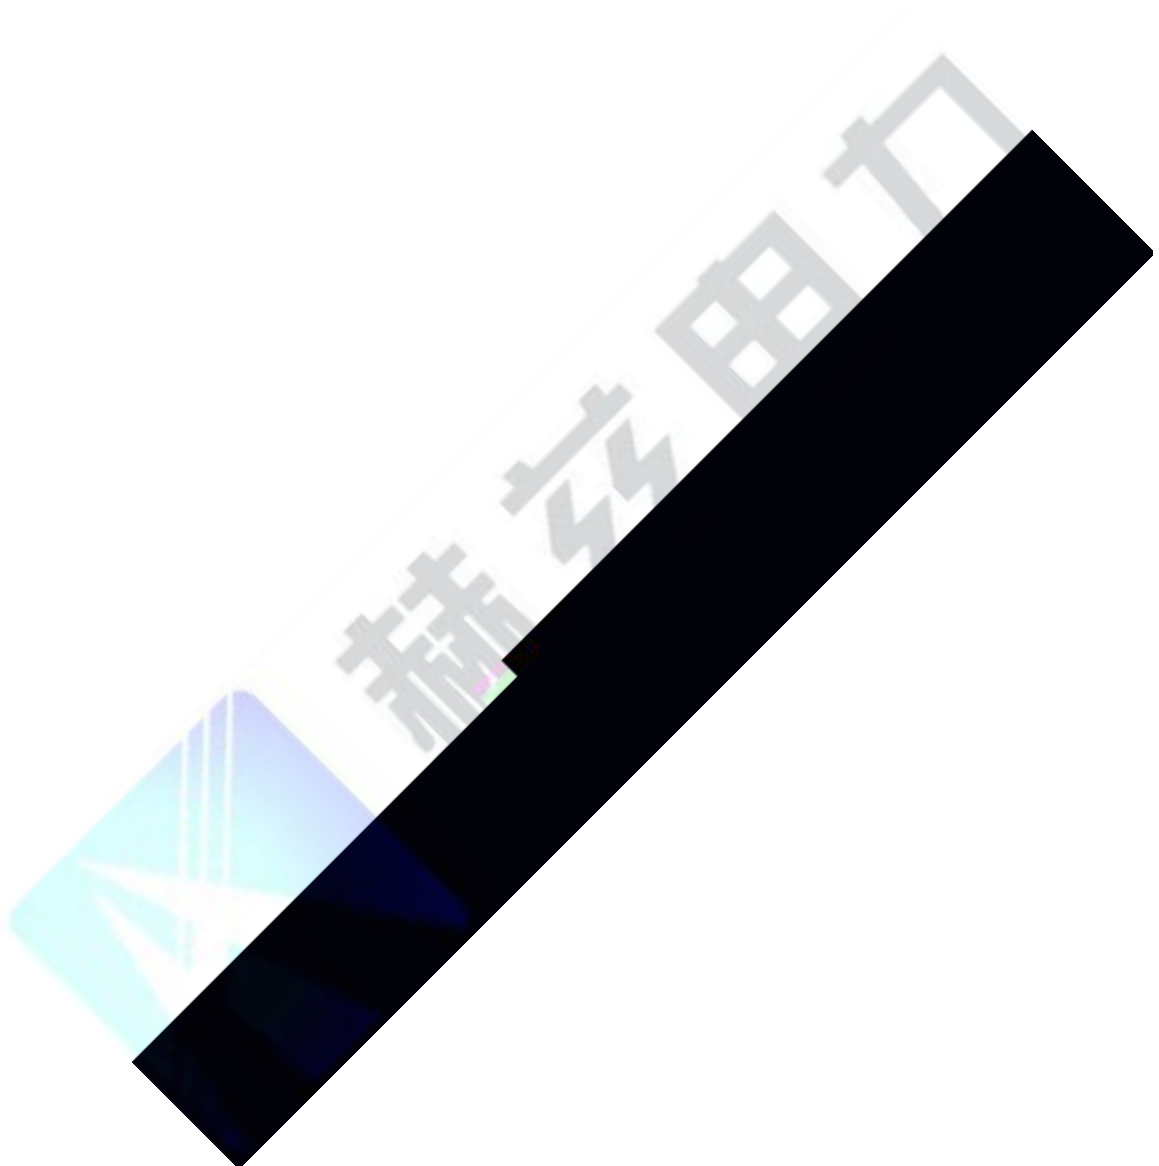

—

“

”

GB3983.2-1989
JB5346-1998

DL/T840-2003

-
-
-
-
-
-
-
-
-
-

；

7.0 1024 × 600

500

U

U

1 100V ± 10% 55Hz
 40V ± 10% 55Hz
 8V ± 10% 55Hz
 2V ± 10% 55Hz

2 :

 : 0.1uF 6000uF ± 1%+0.01uF

 : 50uH 20H ± (3%+0.05uH)

 : 5mA 2A ± (3%+0.05mA)


 : 20mΩ 20kΩ ± (3%+0.1mΩ)

3 5


4 425*335*210 mm

5 8KG

-20 40
≤ 85%RH

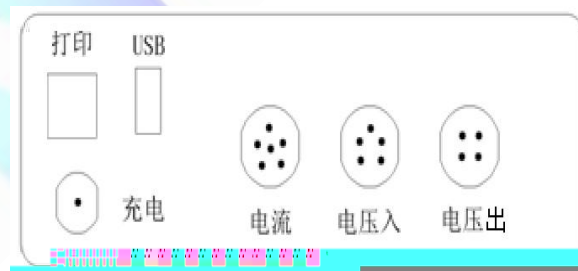




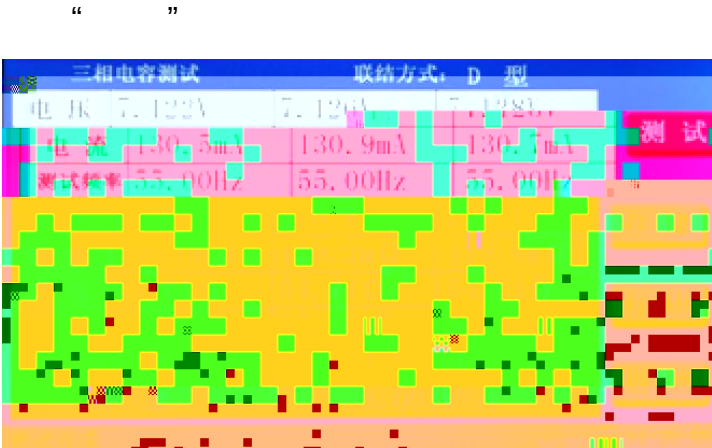

“ ”

CT

2

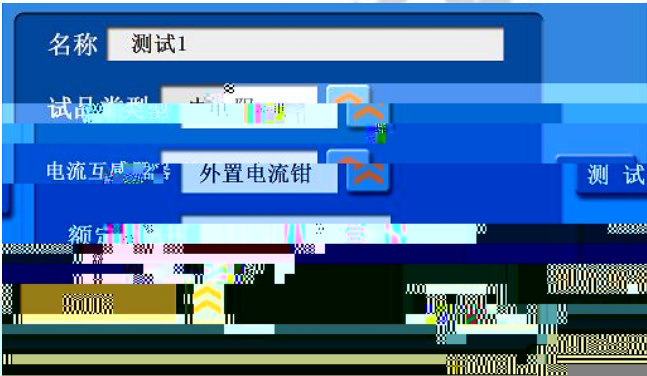

CT



“ ” “ ”

3

名称：测试1		单相电容测试		外置电流钳	
额定频率：50Hz		额定电压：		10.000 kV	
电 压		4.160V	阻 抗		620.6mΩ
电 流		114.9mA	容 抗		39.81Ω
测试频率		55.00Hz	电 容		79.95uF
角 度		269.0°	容 量		2.512MVar

U盘存储

打印


返回

“ U ”

U

4

“ ”

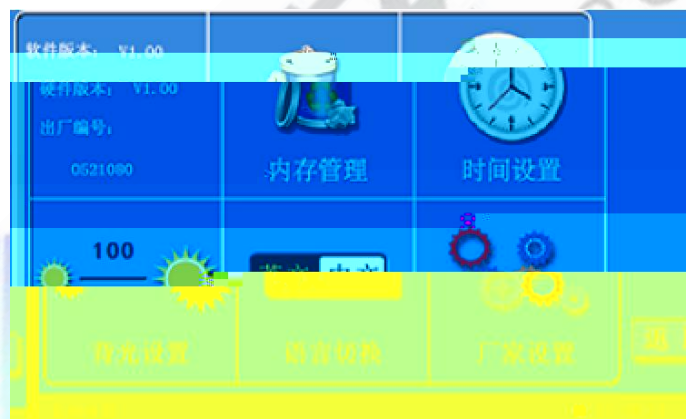

“ ” “ ” “ ”

时间: 2021-01-10 15:11:30

修改

年: 21 月: 01 日: 10 时: 15 分: 11 秒: 30


返回

时间设置 15:17:37

Y


Y Yn

1

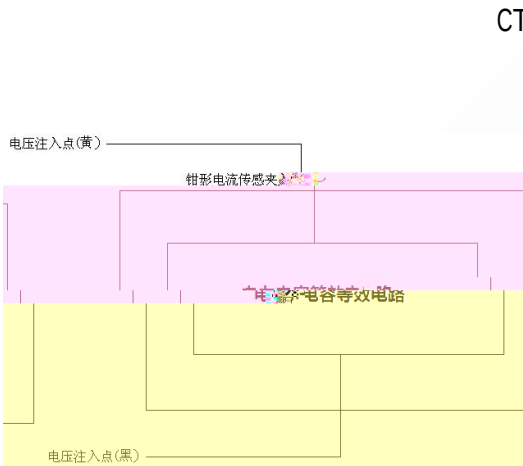

2

1 Y

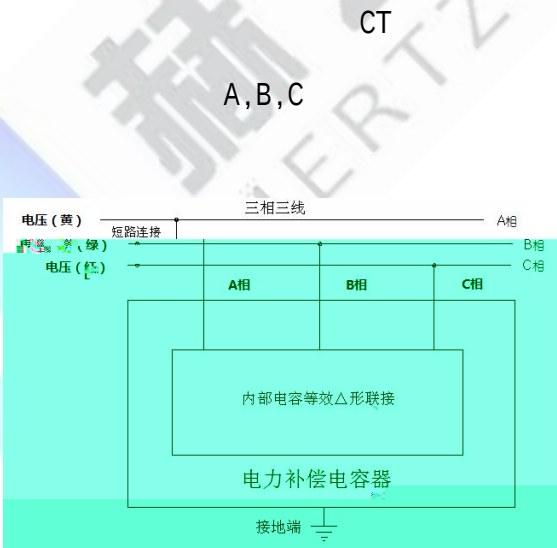

3

Yn CT

A,B,C



赫兹电力
HERTZ POWER

8.1

8.2

8.3

8.4

8.5

8.5

8.6

8.7

1

2

1.

2.

☐ ☐ ☐ ☐

1

2

3

2


24

027-83267669

Ė